


# Exit Station

Exit station with 2D barcode ticket scanner




ParQube LX

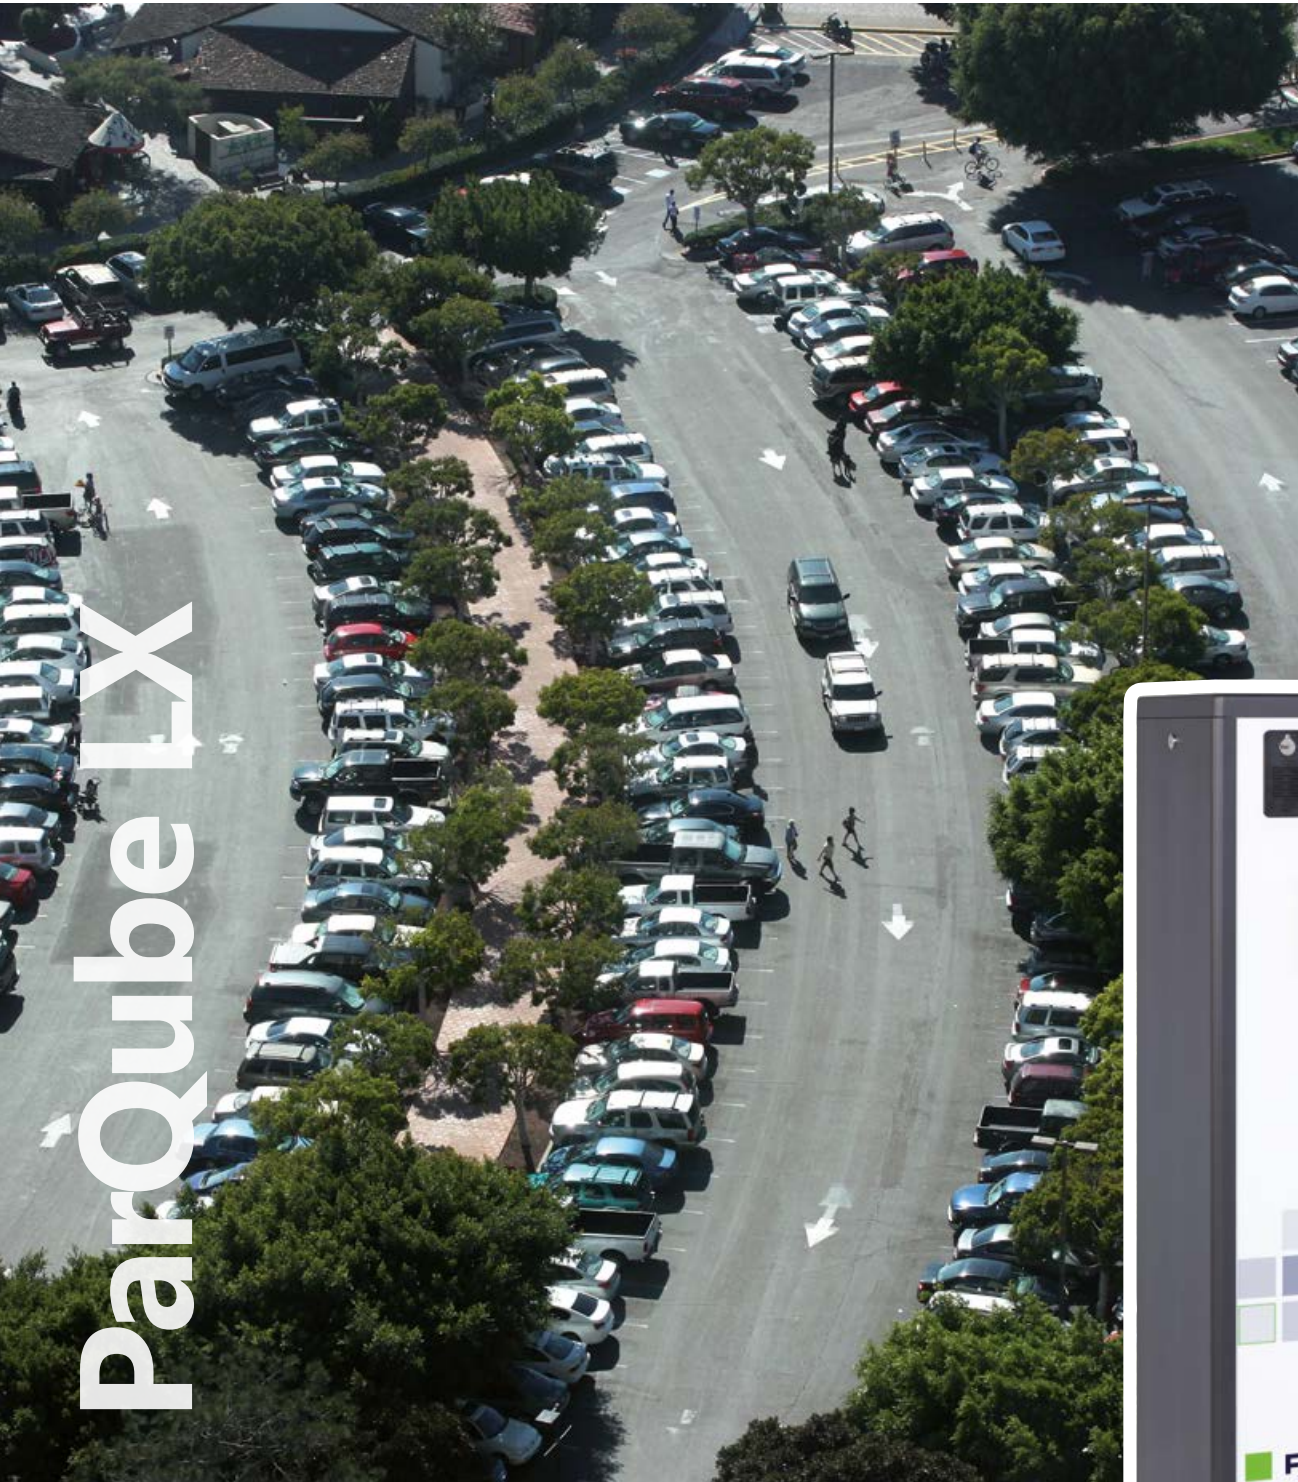

# Exit Station

## Exit station with 2D barcode ticket scanner



### BASE MODEL

---

Outdoor cabinet
Lockable access doors on 2 sides
Structure made of extruded aluminum
Two extruded aluminum doors painted RAL 7021
Front/rear aluminum made sheets painted RAL 9003
Intercom button & cover
Omni-directional laser scanner for tickets
Heater & fan with built in thermostat
Electronic control board with: <ul style="list-style-type: none"><li>- built-in inductive metal detector</li><li>- communication with central unit by RS485 network</li><li>- interface board for unit wiring</li><li>- unit power supply</li></ul>

---

### OPTIONS

---

ParQube style wrapping film for front side on standard color casing
Customized ParQube style wrapping film
Customized color casing
Passive proximity reader for cards 125 kHz ISO size
Active or passive AVI Readers
Backlit LCD display 4 x 20 characters
Full colour graphic screen 7"
Intercom system Analogue
Intercom over IP

---

### Dimensions

- Width: 425mm
- Height: 1260mm
- Depth: 360mm
- Weight: 47 kg

### Power

- 230-115 VAC/50Hz
- Min-Max absorbed power: 60-260 W

### Environment

- Ambient temperature: -20°C/+50°C

Standards: CE, ISO9001

**ParQube LE is a flexible unit that fully controls entry lane by issuing a barcoded ticket to all transient users, by checking card, TAG, etc. to all permanent users. Full color graphic display option, gives clear user messages. Double language display capability. Manages all languages.**

### STANDARD FEATURES

- On line with central unit
- RS485 communication network as standard or TCP/IP by ETH converter
- Two way ticket scanning
  - Scanning resolution 104 lines
  - Scanning speed 1170 lines per second
- Up to 5.000 users storage off line
- Up to 15.000 events storage off line
- Free input for external reader
- Passive proximity reader for cards 125kHz ISO size
  - Type of read cards coding UNIQUE (EM 4102)
  - Max reading distance 10 cm
- Active or passive long range reader (AVI managed by software)
- Antipass-back card management on line with central unit
- Opening pulse operating against valid ticket or card check
- Function setting by an on board jumper

