



## **IN20-iSAS1.3BVF**

1.3 Megapixel bullet camera

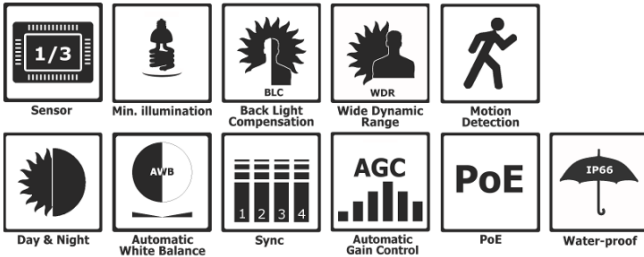

### Features:

- 960P(1280\*960) real time encoding
- Image resolution: 1280\* 960
- Dual streaming
- ICR auto switch for day/night function.
- 20~30 meter night vision range
- Support 3D noise reduction, digital WDR, defog, steady shot
- Support ROI specific area encoding
- Up to 192KHz wide range frequency audio collecting, provide more clue for event review.
- One way audio, PoE, power supply optional.
- Support smart phone, Pad, remote surveillance.
- Supports NAT penetrate.

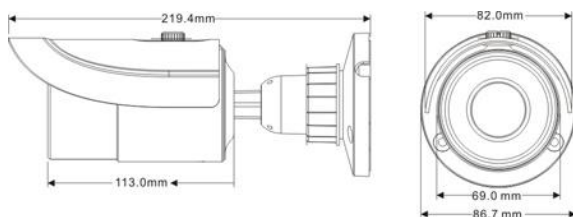

Camera	
Image sensor	1/2.9"CMOS
Image pixels	1280x960
Electronic shutter	1/25s ~ 1/100000s
Auto iris	Fixed iris
Min. illumination	0lux(IR LED ON)
Lens	3.3-12mm
Mount type	Φ14 mount
Image	
Compression	H.264
Resolution	960p (1280x960), 720P(1280x720), VGA(640x480), QVGA(320x240)
Frame rate	1280x960(1~30fps) / 1280x720(1~30fps) 1280x720(1~10fps) / 640x480(1~30fps) / 320x240(1~30fps)
Bit rate:	64Kbps ~ 8Mbps
Encode	VBR/CBR
Quality	VBR 5 level , CBR no limit
Image config.	Saturation, Brightness ,Contrast , WDR (Via IE and client end)
Audio compression	G711A
WDR	Digital
Noise Reduction	3D
Interface	
Internet	RJ45
Video out	CVBS (BNCx1)
Audio	Dual way audio (MIC IN×1, MIC OUT×1)
Storage	Support TF card, Max. capacity up to 64GB
RS485	Yes
Alarm in	1CH
Alarm out	1CH
Function	
Remote surveillance	IE browser, CMS remote control
Online user	4 users, support multi-stream real time transmission.
Network protocol	TCP/IP, UDP, DHCP, NTP, RTSP , PPPoE , DDNS ,SMTP ,FTP
Interface protocol	ONVIF、GB-T/28181-2011
Storage	TF card local storage, remote storage
Smart alarm	Motion, sensor
Day/night	ICR
PTZ	RS485x1
PoE	Yes
Night vision range	30-50m
Water proof	IP66
Others	
Power supply	DC12V/POE
Power consumption	2.52W
Power consumption with IR on	8.04W
Working environment	-40°C ~ 50°C, 10% ~ 90% humidity
Dimension	Φ112mm×326mm
Weight(net)	1115g