


## **IN20-iSAS2.0MBF4MM**

2.0 Megapixel bullet camera



### Features:

- 1080P full real time coding
- Max. resolution: 1920×1080
- 3D DNR, digital WDR, defog and image stabilization
- Corridor mode optional
- ROI coding
- Broadband audio capture up to 192KHz for providing
- CVBS local video, one-way audio, PoE
- ICR auto switch, true day / night
- Support smart phone, iPad, remote monitoring
- NAT traversal

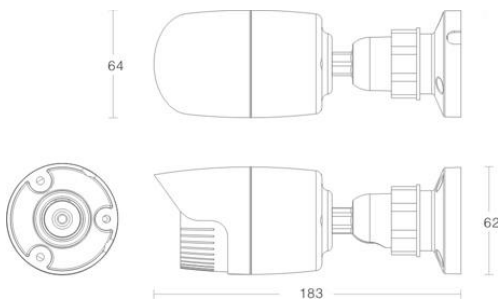

Camera	
Image sensor	1/3"CMOS
Image pixels	1920x1080
Electronic shutter	1/25s~ 1/100000s
Auto iris	Fixed iris
Min. illumination	0lux(IR ON)
Lens	4mm
Mount type	M12 mount
WDR	Digital
Noise Reduction	3D
Image	
Compression	H.264
Resolution:	1080P(1920x1080), 720P(1280x720), VGA(640x480), QVGA(320x240)
Frame rate:	1920x1080(1~30fps) / 1280x720(1~ 30fps) 1280x720(1 ~10fps) / 640x480(1 ~ 30fps) / 320x240(1 ~30fps)
Bit rate:	64Kbps ~ 8Mbps
Encode	VBR/CBR
Quality	VBR 5 level , CBR no limit
Image config.	Saturation ,Brightness, Chroma, Contrast , WDR, Sharpness, NR (Via IE and client end)
Audio compression	G711A
Interface	
Internet	RJ45
Video out	BNC×1
Audio	One way (MIC IN×1)
Storage	No
RS485	No
Alarm in	No
Alarm out	No
Function	
Remote surveillance	IE,CMS
Online user	4users, support multi-stream real time transmission.
Network protocol	TCP/IP, UDP , DHCP ,NTP , RTSP, PPPoE, DDNS, SMTP, FTP
Interface protocol	ONVIF, GB-T/28181-2011
Storage	Remote storage via network
Smart alarm	Motion
Day/night	ICR
PTZ	No
PoE	Yes
Night vision range	10-20m
Water proof	IP66
Others	
Power supply	DC12V/PoE
Power consumption	2.26W
Power consumption with IR on	4.97W
Working environment	-40°C ~ 50°C, 10% ~ 90% humidity
Dimension	Φ64mm×183mm
Weight(net)	423g
Weight(gross)	546g