


The fixed **275/K4FB 900F** PILOMAT have been designed and built with architectural appearance similar to that of the mobile PILOMAT and therefore also allows the combined use of both versions. The current models are the result of the development of more than 15 years of experience.


GENERAL FEATURES


The fixed antiterrorism PILOMAT are used to separate and prevent vehicles from breaching the perimeter of the following areas: Research Centres Embassies, Police Headquarters, Military Bases, Ministerial Buildings Sites in Sensitive Areas.

- **KFB SERIES:** these items are designed to ensure antiterrorism defence, and must be cemented into the ground at a depth that meets the standards of resistance of breakout.
- **Choice of optional configurations:**
 - FE370 or AISI 304 stainless steel moving cylinders
 - custom colours
 - flashing lights integrated in the head.

| | |
|---|--|
| FIXED CYLINDER | FE 510 STEEL (IRON) |
| FIXED CYLINDER NOMINAL DIAMETER | 275 mm |
| FIXED CYLINDER HEIGHT | 900 mm |
| FIXED CYLINDER FE 510 STEEL THICKNESS | 10 mm |
| FIXED CYLINDER FE 510 STEEL FINISH | POLYESTER POWDER PAINT - STANDARD GREY ANTHRACITE |
| OTHER FIXED CYLINDER FINISH | RIBS ON CYLINDERS SURFACE - 316 AISI STAINLESS STEEL BRUSHED COVERING 1,5 mm |
| REFLECTING ADHESIVE STRIP | YES - HEIGHT 55 mm |
| IMPACT RESISTANCE (WITHOUT DEFORMATION) | 150.000 J |
| BREAKOUT RESISTANCE | 700.000 J |

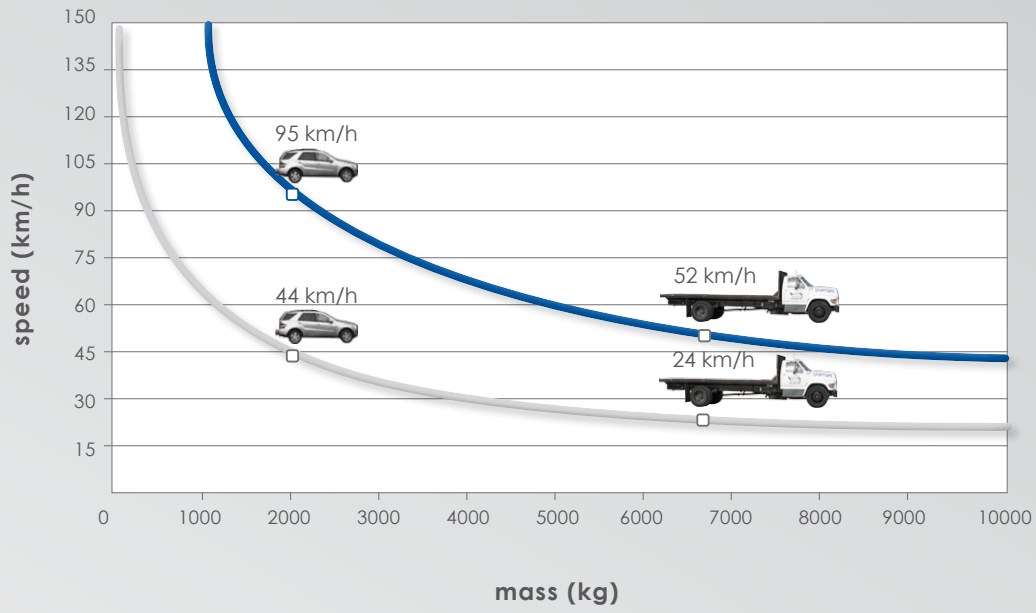

■ BREAKOUT RESISTANCE **700.000 J**
■ IMPACT RESISTANCE **150.000 J**



MAIN DIMENSIONS

