


The fixed **275/K4 700F** PILOMAT have been designed and built with architectural appearance similar to that of the mobile PILOMAT and therefore also allows the combined use of both versions. The current models are the result of the development of more than 15 years of experience.

GENERAL FEATURES


The fixed antiterrorism PILOMAT are used to separate and prevent vehicles from breaching the perimeter of the following areas: Research Centres Embassies, Police Headquarters, Military Bases, Ministerial Buildings Sites in Sensitive Areas.

- **K SERIES:** These items, with a counterframe to wall, in addition to the architectural appearance of the K4 PILOMAT, allow for the removal of the bollard in the event of such a removal being needed, or if impact has occurred.
- **Choice of optional configurations:**
 - FE370 or AISI 304 stainless steel moving cylinders
 - custom colours
 - flashing lights integrated in the head.

FIXED CYLINDER	FE 510 STEEL (IRON)
FIXED CYLINDER NOMINAL DIAMETER	275 mm
FIXED CYLINDER HEIGHT	700 mm
FIXED CYLINDER FE 510 STEEL THICKNESS	10 mm
FIXED CYLINDER FE 510 STEEL FINISH	POLYESTER POWDER PAINT - STANDARD GREY ANTHRACITE
OTHER FIXED CYLINDER FINISH	RIBS ON CYLINDERS SURFACE - 316 AISI STAINLESS STEEL BRUSHED COVERING 1,5 mm
REFLECTING ADHESIVE STRIP	YES - HEIGHT 55 mm
IMPACT RESISTANCE (WITHOUT DEFORMATION)	150.000 J
BREAKOUT RESISTANCE	700.000 J

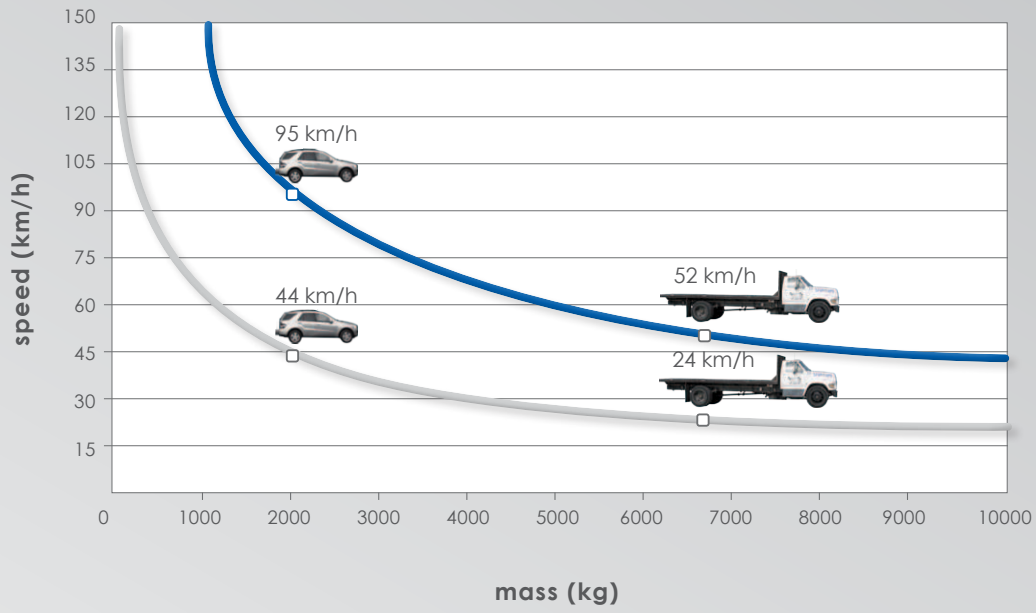

■ BREAKOUT RESISTANCE 1.500.000 J

■ IMPACT RESISTANCE 700.000 J



MAIN DIMENSIONS

